

# INFINITY FORTRESS

## Home/Business High Security Safe UL Rated TL-30

Megasafe is proud to introduce its new and improved UL Rated TL-30 high-security safes. Designed, tested and constructed by a team of international safe experts and engineers. The Megasafe INFINITY is built to withstand the most concentrated modern day burglary attacks as well as a fire rating of 2 hrs. With Megasafe you enjoy a track record of manufacturing and supplying the world's stongest, quality-built high security safes and vaults....since 1914.

### DOOR

The INFINITY's door is constructed of inner and outer electronically welded steel plates including our "Z" reinforcement bars covering the entire door. An advanced manganese alloy super steel hardplate covers the entire door to protect the locks and mechanism areas against drilling and cutting. The door has an overall thickness of 5¼" (130mm) with a barrier thickness of 3" (75mm). The specific arrangement and choice of the high-tech barrier materials is what gives the door superior resistance to concentrated and repeat burglary attack with a wide range of modern tools.

### BODY

Megasafe has redesigned the INFINITY's security barrier in the body of the safe achieving a thinner and lighter high-tech security barrier without compromising its integrity and security. It is constructed of inner and outer electrically welded steel plates including our "Z" reinforcement bars welded to the inner and outer body that together with Megasafe's ultra dense "Megacrete" and reinforcement special alloy grid form a 3" (75mm) uniquely strong body.

### BOLTWORK AND RELOCKING MECHANISM

Megasafe's patented 3 way, laser-cut locking mechanism activates massive 1 3/8" (35mm) bolts.

A continuous, reinforced interlock rail secures the door on the hinge side. A tempered glass plate protects the vital mechanism area. An attack by tool, torch or explosives will shatter the glass activating two independent relocking devices which additionally lock the boltwork mechanism.

### LOCKS

The INFINITY Fortress is equipped with a Group 2 UL-listed combination lock. Each safe can also be fitted with optional secondary U.L.-Listed key lock. An optional U.L.-Listed electronic combination lock can also be fitted on the safe as an optional extra.



**IT 5520**  
*Gold Edition*



TL-30 safe  
BP20990




**IT 5520**  
Graphite Gray  
& Stainless

**Advanced Burglary + 2hr Fire Protection**

# INFINITY

**UL Rated TL-30  
+ 2 hr fire protection**

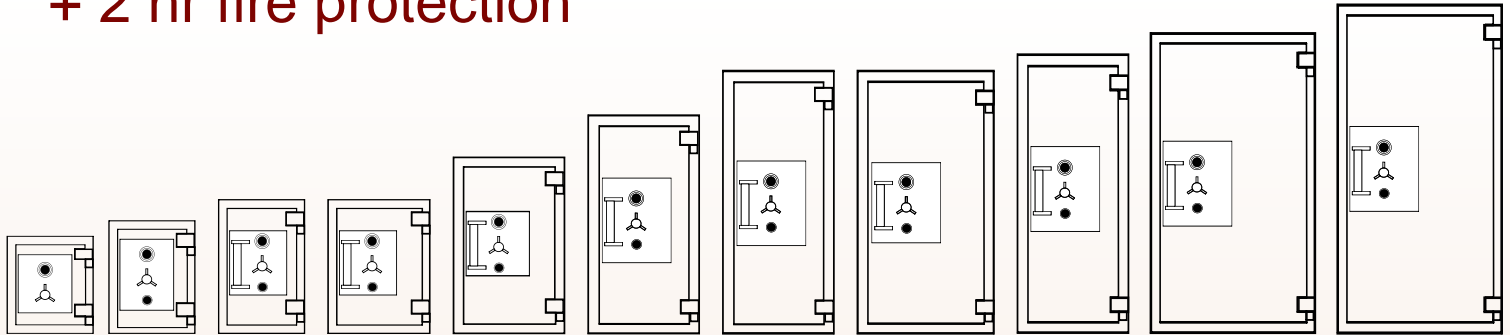

IT1414 IT2014 IT2514 IT2518 IT3520 IT4520 IT5520 IT5526 IT6020 IT6333 IT7036

MODEL	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			WEIGHT
	H	W	D*	H	W	D*	
IT 1414	14.0" (355mm)	14.0" (355mm)	12.0" (305mm)	20.0" (505mm)	20.0" (505mm)	21.6" (550mm)	650lbs (295)
IT 2014	20.0" (508mm)	14.0" (355mm)	12.0" (305mm)	26.0" (660mm)	20.0" (505mm)	21.6" (550mm)	750 lbs (340 kg)
IT 2514	25.0" (635mm)	14.0" (355mm)	14.0" (355mm)	31.0" (785mm)	20.0" (505mm)	23.2" (590mm)	870 lbs (395 kg)
IT 2518	25.0" (635mm)	18.0" (458mm)	20.0" (502mm)	31.0" (788mm)	24.0" (608mm)	29.3" (745mm)	1250 lbs (568 kg)
IT 3520	35.0" (890mm)	20.0" (508mm)	20.0" (508mm)	41.0" (1.040mm)	26.0" (658mm)	29.3" (745mm)	1680 lbs (763 kg)
IT 3526	35.0" (890mm)	26.0" (660mm)	20.0" (508mm)	41.0" (1.040mm)	31.9" (810mm)	29.3" (745mm)	1786 lbs (810 kg)
IT 4520	45.0" (1143mm)	20.0" (508mm)	20.0" (508mm)	50.9" (1293mm)	25.9" (658mm)	29.3" (745mm)	1950 lbs (886 kg)
IT 5520	55.0" (1397mm)	20.0" (508mm)	20.0" (508mm)	60.9" (1547mm)	25.9" (658mm)	29.3" (745mm)	2200 lbs (1000 kg)
IT 5526	55.0" (1397mm)	26.0" (660mm)	20.0" (508mm)	60.9" (1547mm)	31.9" (810mm)	29.3" (745mm)	2680 lbs (1218 kg)
IT 6020	60.0" (1524mm)	20.0" (508mm)	23.5" (597mm)	65.9" (1674mm)	25.9" (658mm)	32.9" (837mm)	2680 lbs (1218 kg)
IT 6333	63.0" (1600mm)	33.0" (838mm)	20.0" (508mm)	68.8" (1748mm)	37.9" (962mm)	29.3" (745mm)	3460 lbs (1572 kg)
IT 7036	70.0" (1.778mm)	36.0" (915mm)	26.0" (660mm)	75.9" (1928mm)	41.9" (1065mm)	35.4" (900mm)	4650 lbs (2113 kg)


## Door Swing Dimensions

\*Add 2 3/4" (70mm) to outside depth for handle and hinges

MODEL	A	B	C
IT 1414	14.0"	39.7"	38.6"
IT 2014	(355mm)	(1009mm)	(980mm)
IT 2514	14.0"	41.7"	38.6"
	(355mm)	(1059mm)	(980mm)
IT 3520	20.0"	53.7"	48.6"
	(508mm)	(1365mm)	(1235mm)
IT 4520	20.0"	53.7"	48.6"
	(508mm)	(1365mm)	(1235mm)
IT 5520	20.0"	53.7"	48.6"
	(508mm)	(1365mm)	(1235mm)
IT 6020	20.0"	57.3"	48.6"
	(508mm)	(1454mm)	(1235mm)



## Door Swing Projections



Authorized Dealer:

The manufacturer reserves the right to incorporate any improvements and alter any specifications without prior notice.